



Inline Check Valve

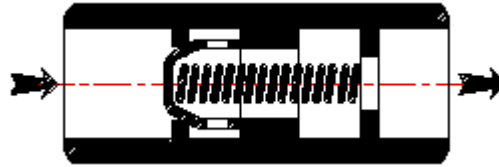

■ 설치가 용이하고 배관 연결구처럼 사용할 수 있습니다.

SYMBOL



HOW TO ORDER :

HC - 4 - 00 - (5) - □

Inline Check Valve


Size	
4	1/4"
6	3/8"
8	1/2"
12	3/4"
16	1"
20	1 1/4"
24	1 1/2"
32	2"

Material	
S	STEEL
B	BRASS
SS	STAINLESS STEEL

크래킹 압력	
무기호	0.5 kgf/cm ²
5	5 kgf/cm ²


Port	
00	PT
10	NPT
20	PF

PRESSURE DROP CURVE

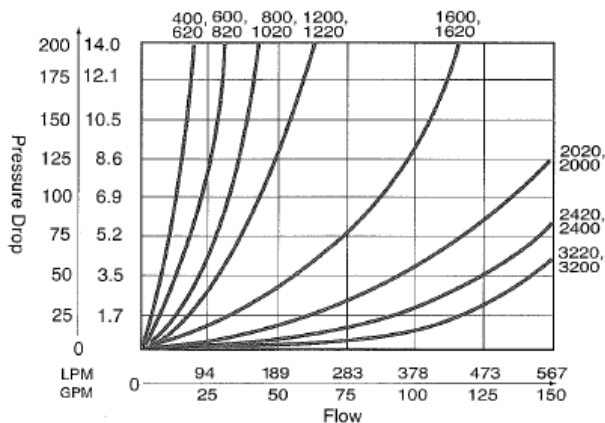

INSTALLATION

DIMENSIONS

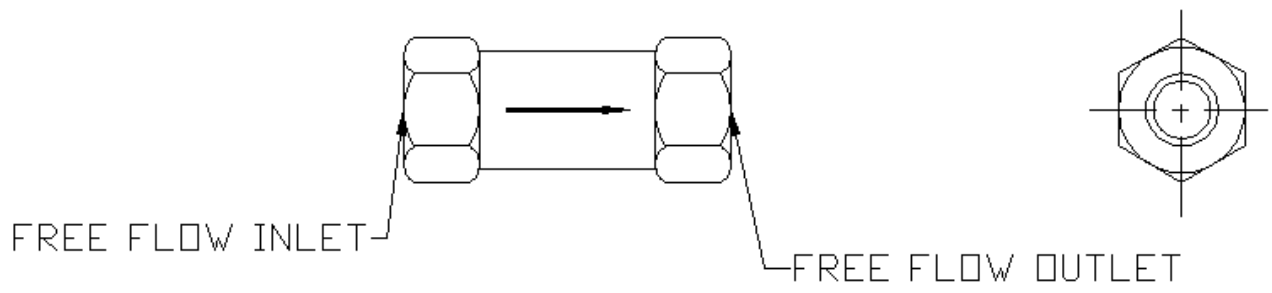

형 식	SIZE (PT)	Free Flow (L/min)	DIMENSION(mm)	
			A	B
HC 400	1/4"	23	60	22
HC 600	3/8"	30	65	25
HC 800	1/2"	45	83	30
HC 1200	3/4"	100	93	38
HC 1600	1"	150	117	45
HC 2000	1 1/4"	280	130	55
HC 2400	1 1/2"	380	130	60
HC 3200	2"	600	160	72